




STOCKWELL ELASTOMERICS, INC.
4749 Tolbut Street Philadelphia, PA 19136
(800) 523-0123 (215) 335-3005 Fax (215) 335-9433
www.stockwell.com e-mail: service@stockwell.com

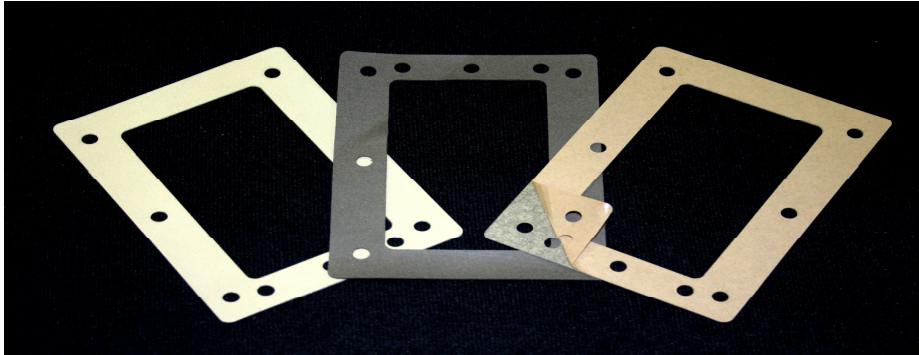

SNEF-60

Compound: Conductive Fluorosilicone with Nickel Graphite Filler

Property	Typical Values
Durometer, Shore "A"	60 (range: 55 - 65)
Volume Resistivity, ohm-cm	0.05
*Shielding Effectiveness, dB	90 @ 10 GHz
Tensile Strength, psi	285
Elongation, %	450
Tear "B", pli	55
Temperature Low, °C (°F)	-70
Temperature High, °C (°F)	260
Specific Gravity	1.89
Color	Black

* Additional data available upon request

4749 Tolbut Street, Philadelphia PA, 19136

P: 800-523-0123 (USA), 215-335-3005 | F: 215-335-9433 | E: service@stockwell.com

Copyright ©2007 Stockwell Elastomerics, Inc. All Rights Reserved