

Combination EMI Gaskets

Combination EMI Gaskets are made from silicone sponge or foam with knitted monel wire mesh cord bonded to the edge of the gasket. The soft silicone sponge provides environmental sealing for dust and rain while the wire mesh provides EMI / RFI sealing. The combination EMI gaskets require less compression force to create a proper seal than metal filled EMI gaskets while offering the same EMI / RFI shielding.

Stockwell Elastomerics maintains a full inventory of silicone sponge products that can be combined with Monel wire mesh to make a combination EMI gasket. Stockwell Elastomerics also offers combination EMI gaskets made from closed cell fluorosilicone sponge and Monel wire mesh for applications requiring a higher level of chemical resistance.

Available Material for Combination EMI Gaskets

Material Type	Advantages	Examples	Compression Deflection
Silicone Sponge	- Good environmental sealing for rugged or outdoor applications - Available in soft, medium, and firm grades - Widely used for military enclosures and remote location applications where environmental conditions can vary greatly	R10480S	25%: 7psi 50%: 21psi
		R10480M	25%: 11psi 50%: 25psi
		R10470M	25%: 11psi 50%: 27psi
UL Rated Silicone Foam	- Often used for water or dust sealing function of the combination gasket - Excellent UV and ozone resistance and compression set resistance - Closed cell foams used for water sealing applications - Open cell foams used for dust sealing	HT-800	25%: 9psi 50%: 22psi
		BF-1000	25%: 3psi 50%: 5psi
		HT-840	25%: 22psi 50%: 46psi
Fluorosilicone Sponge	- Great for military and aerospace applications requiring additional chemical resistance for exposure to fuels or cleaning agents - Similar temperature resistance to silicone with enhanced chemical resistance	R-10490	25%: 15psi 50%: 49psi



MATERIAL DATA SHEET

Combination EMI Gaskets



Monel Wire Mesh



Knitted Monel Wire Mesh provides EMI / RF shielding for combination EMI gaskets. The knitted monel wire is a soft, conformable, metal fiber mesh intertwined together to help block out EMI radiation.

SHIELDING EFFECTIVENESS

H-Field 100 kHz	60+ db
E-field 10 MHz	130 db
Plane wave 1 GHz	90 db
Plane wave 10Ghz	80 db

Compression Stops

Stockwell Elastomerics offers combination EMI Gaskets with standard or custom Compression Stops, sometimes called compression limiters. Compression stops create a maximum compression for the gasket and prevent it from being crushed under torque. The use of compression stops allow assemblers to use torque specifications since fasteners will seat on the metal hard stop.

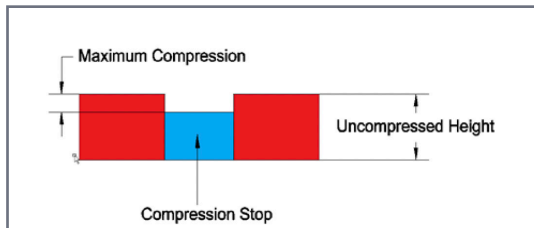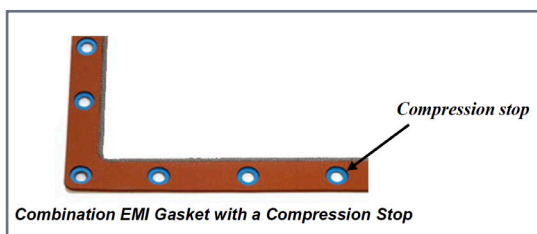

Scan To Learn More:

