



PORON® Urethane Compression Force Deflection Curves
Compression Force Deflection (strain rate 0.1 in/min)


4790-92 Extra Soft

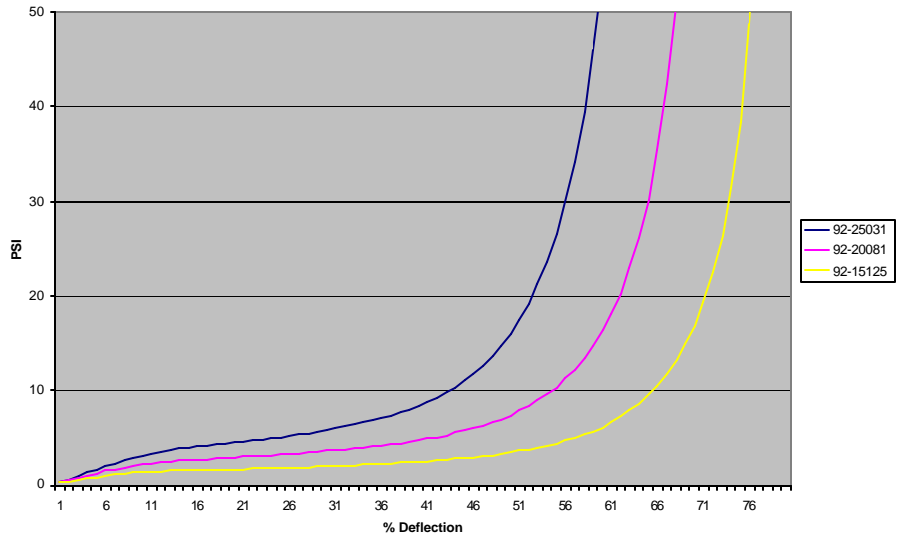


4701-30 Very Soft

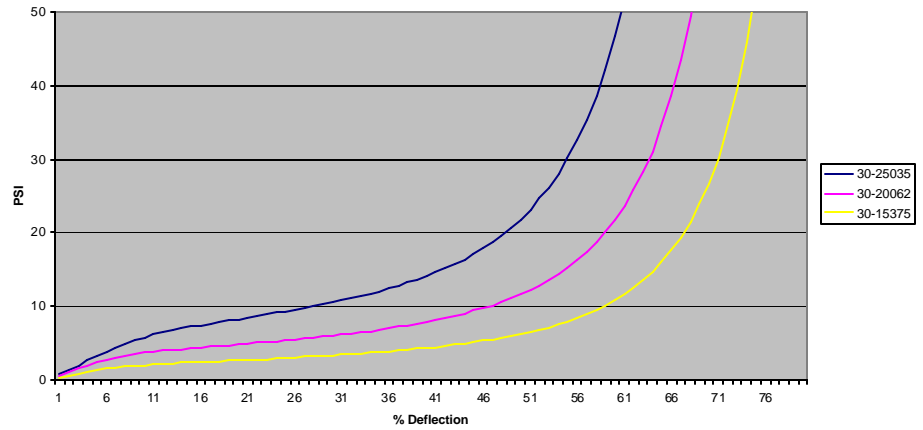


4701-40 Soft

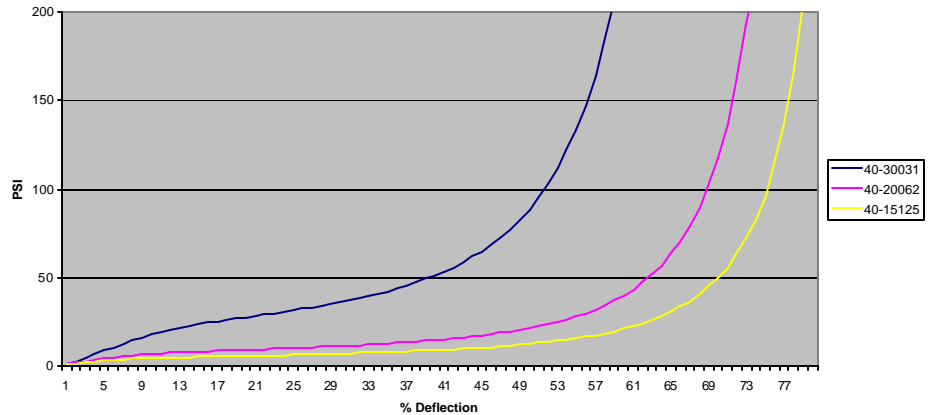


4701-41 Soft
Enhanced Sealability

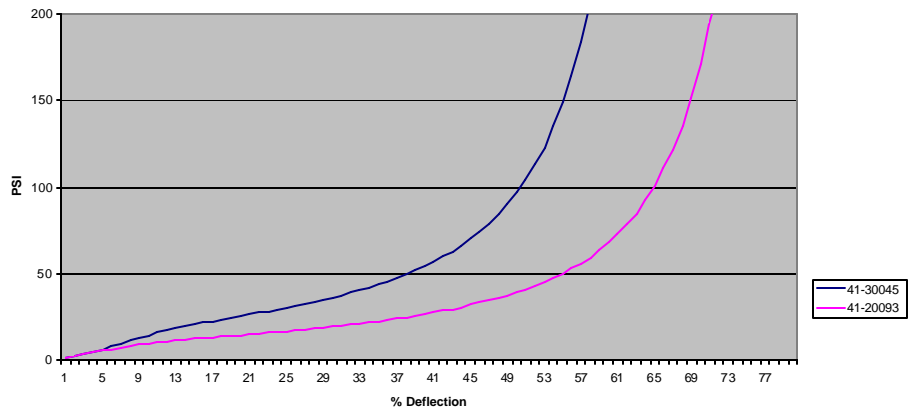

4701-50 Firm

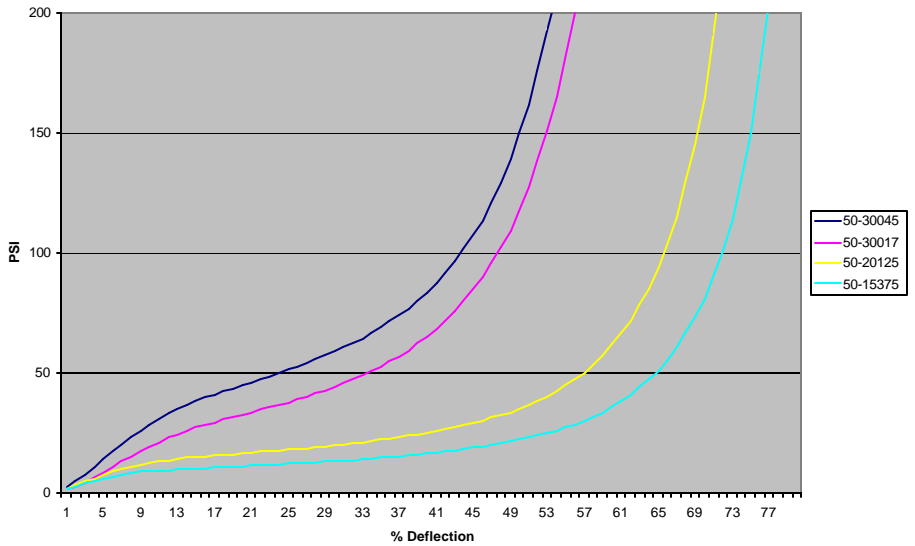

4701-60 Very Firm

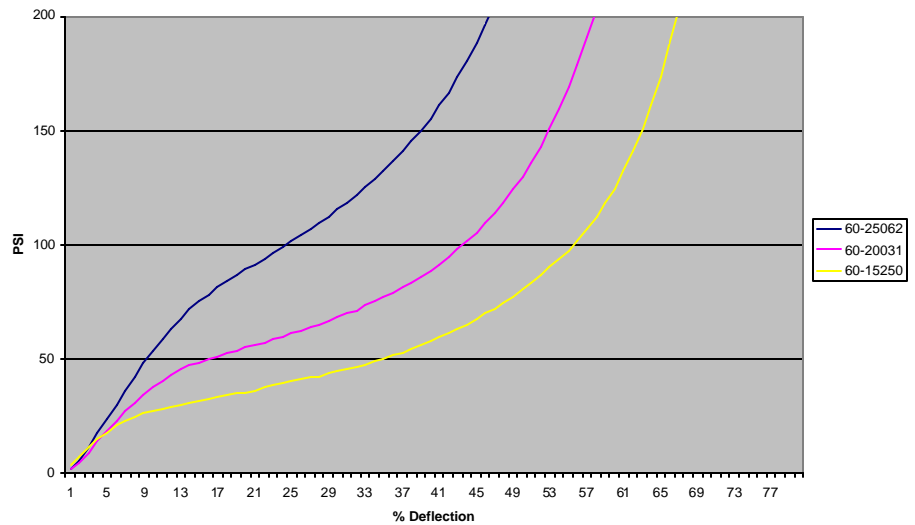

The information contained in this data sheet is intended to assist you in designing with Rogers PORON Urethanes. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown in this data sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers PORON Urethanes for each application.