




# STOCKWELL ELASTOMERICS

MANUFACTURING SOLUTIONS THROUGH ENGINEERED MATERIALS

**Product: EMI Gasket**

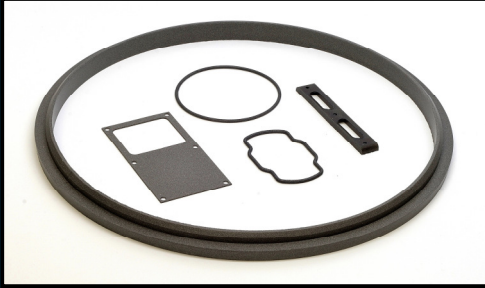

**Related Web Page:**  
<http://www.stockwell.com/emi-gaskets.php>

**Stockwell Value Proposition:**

**Design & Engineering** - staff engineers comprehend design challenges and are available to help select materials and manufacturing processes that best fit your application needs.

**Material Solutions** - Stockwell Elastomerics has strategically partnered with industry leaders such as Rogers Corp., St. Gobain, 3M, Wacker Silicones and Momentive Silicones to ensure the highest quality materials are used. Stockwell Elastomerics has a comprehensive inventory of engineered materials designed and manufactured to meet requirements of the most demanding gasketing applications.

**Pre-Production through Manufacturing** - combining in-house CNC die cutting, waterjet cutting, injection molding, compression molding and adhesive lamination with comprehensive inventory; Stockwell Elastomerics can fulfill fast-turn prototyping, pre-production and full production requirements.

## SNE-556

**Compound:** 65 Durometer Conductive Silicone Rubber with Nickel / Graphite Filler

**Product Description:**

SNE-556, is a silicone polymer with nickel coated graphite particle fill giving it very good shielding and grounding properties. High performance and competitively priced, SNE-556 makes an excellent option for commercial and military EMI applications.

SNE-556 has undergone significant 3rd Party testing and has been approved on several defense equipment programs. Stockwell Elastomerics offers pre-production and full production parts made from SNE-556; including waterjet cutting, die cutting, and molding. 3M conductive adhesive backing is also available for cut parts and select molded parts.

Property	Typical Value
<b>Durometer</b> , Shore "A", (+/- 5)	65
<b>Volume Resistivity</b> , ohm-cm	0.04
<b>*Shielding Effectiveness</b> , dB	>100 (@ 20MHz - 10GHz)
<b>Tensile Strength</b> , minimum, psi	200
<b>Elongation</b> , min %	200
<b>Tear "B"</b> , min ppi	45
<b>Temperature Low</b> , °C (°F)	-60 (-76)
<b>Temperature High</b> , °C (°F)	220 (428)
<b>Specific Gravity</b>	1.89
<b>Color</b>	Black
<b>Mil-G-83528</b>	N/A
<b>Available Configurations</b>	<ul style="list-style-type: none"> <li>• Sheets</li> <li>• Cut Parts (Waterjet/Die Cut)</li> <li>• Molded Parts</li> <li>• Conductive Adhesive Backed</li> </ul>

\*Additional data available upon request,  
 3rd party tested, method: MIL-DTL-83528D